




沈阳三洋建筑机械有限公司
SHENYANG SANYO BUILDING MACHINERY CO., LTD



TOWER CRANE **QTZ型1200tm**
(S1200M64)



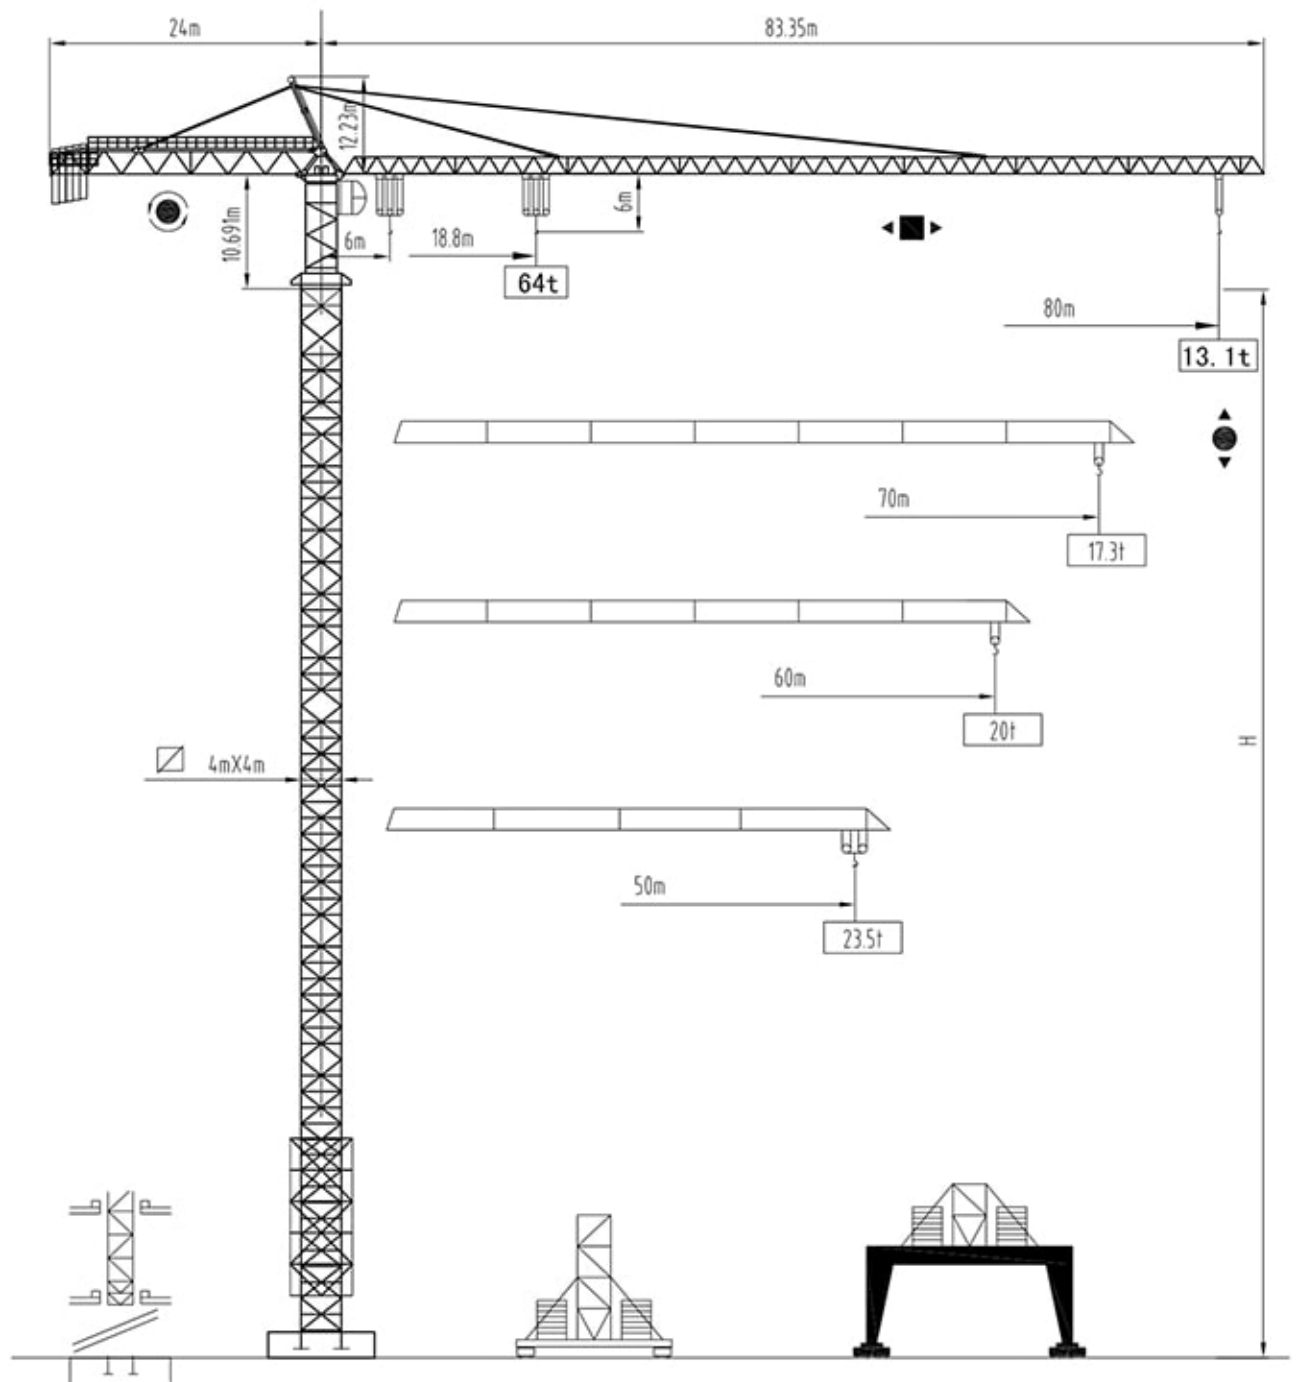

塔身截面 Mast \square 4m \times 4m

50-80m

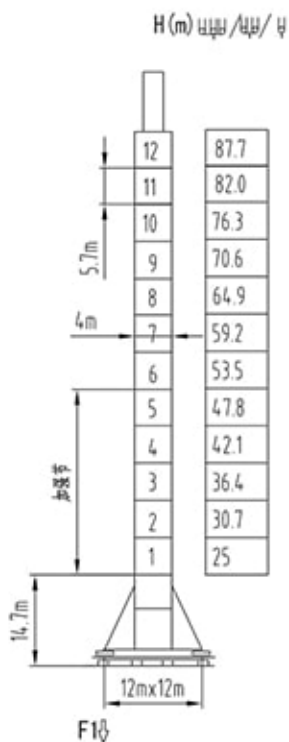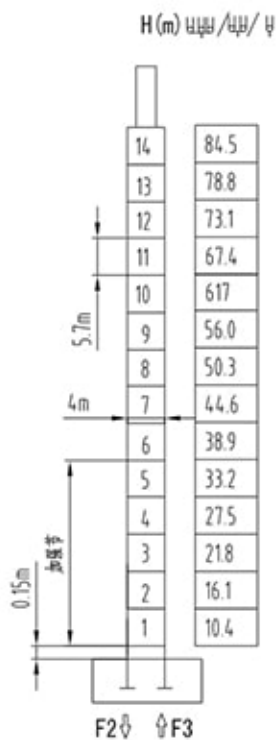

F2	• 350t	▪ 328t
F3	• 95t	▪ 128t
	323t	


F1	• 275t	▪ 248t
	405t	

固定式附着高度 Anchoring height of stationary crane






★ 紧固附着框 Anchorages tightened

△ 放松附着框 Anchorages released

如需达到更高的高度，请与我们联系。For greater heights, consult us.

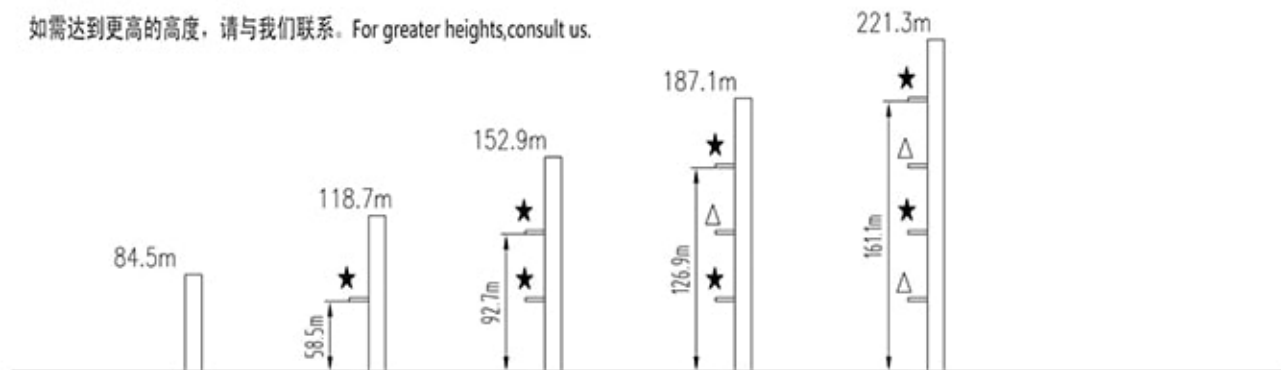










载荷特性 Load diagrams




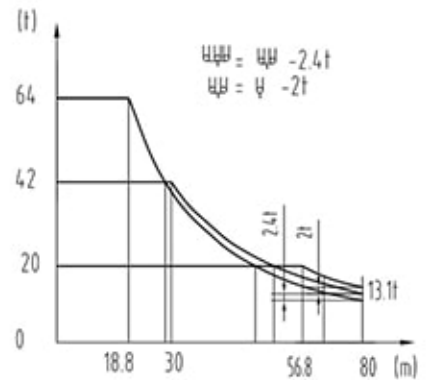


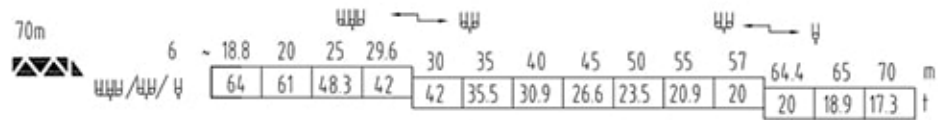
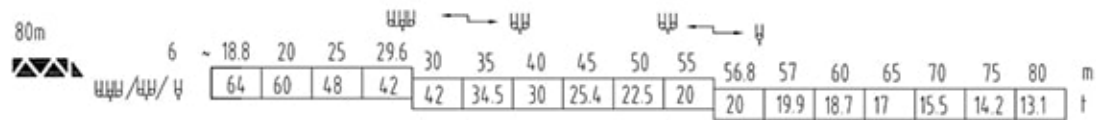







$\frac{64}{6}$ / $\frac{64}{6}$ 标准小车可使用6/4倍率绳, (使用六倍率绳时, 应从四倍率的载荷中减去2.4吨)
 standard trolley 6/4 fall.(When using $\frac{64}{6}$ subtract 2.4t from the loads $\frac{64}{6}$).



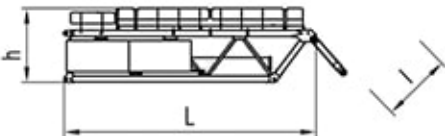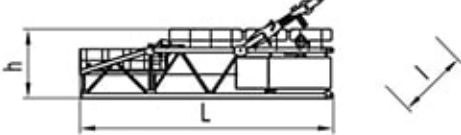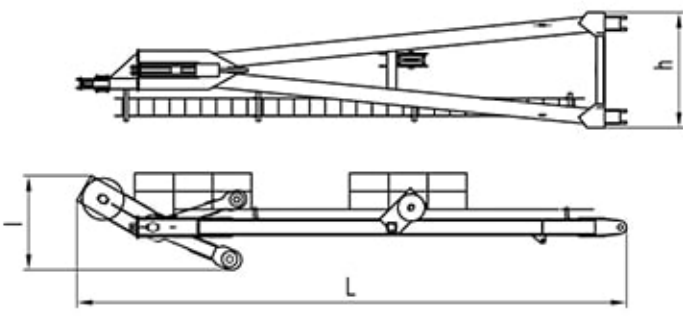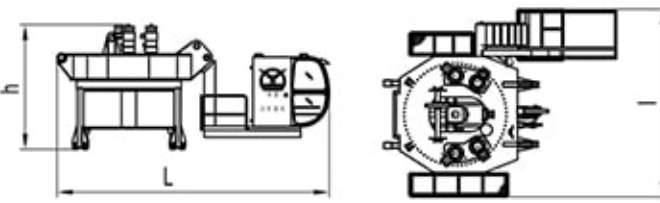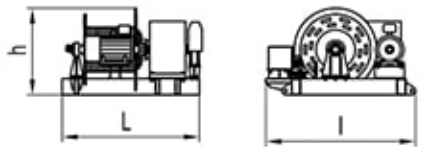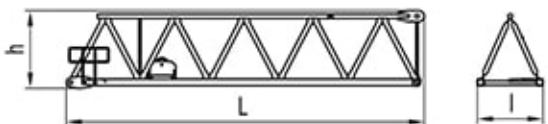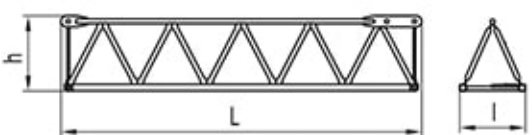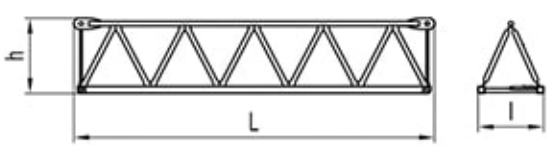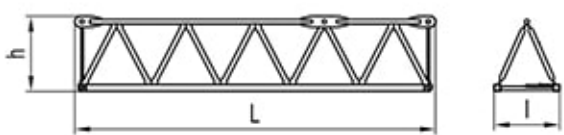

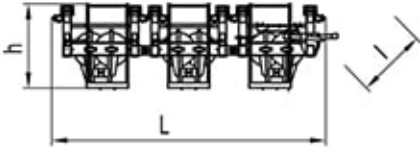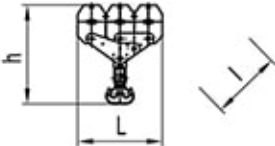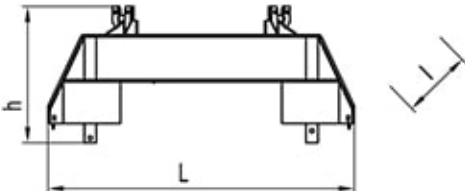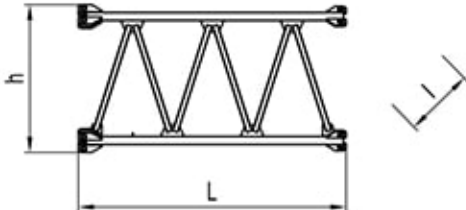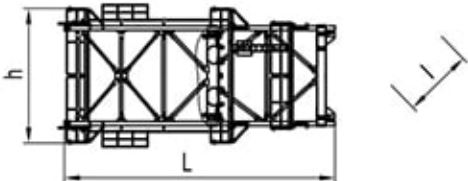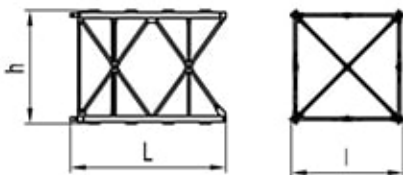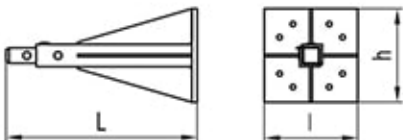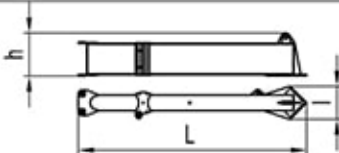

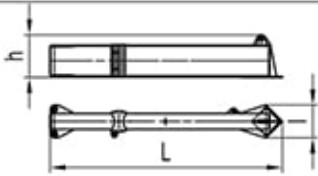$\frac{64}{6}$ / $\frac{64}{6}$ 标准小车可使用4/2倍率绳, (使用四倍率绳时, 应从二倍率的载荷中减去2吨)
 standard trolley 4/2 fall.(When using $\frac{64}{6}$ subtract 2t from the loads $\frac{64}{6}$).

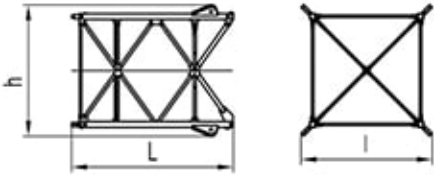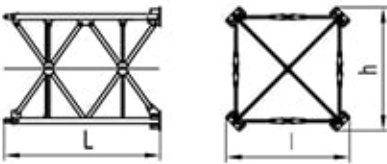外形尺寸重量表 Dimensions weights



塔机回转部分 Slewing		L(m)	l(m)	h(m)	Kg	
平衡臂根节 Counter-jib root		13.505	3.98	3.760	17500	
平衡臂端节 Counter-jib nose		12.205	2.685	3.760	13575	
塔头 Cat-head		10.6	1.80	2.222	5050	
回转机构 Slewing mechanism		7.862	5.43	5.421	29743	
起升机构 Hoisting mechanism		3.080	3.290	1.910	14580	
起重臂节 Jib section		10.34	1.90	2.262	5357	
起重臂节 Jib section		10.42	1.90	2.185	4930	
起重臂节 Jib section		3	10.42	1.90	2.205	4845
		4	10.42	1.90	2.205	4666
		5	10.42	1.90	2.205	4213
		7	10.41	1.90	2.128	4152
		8	10.27	1.90	2.086	2755
起重臂节 Jib section		10.45	1.90	2.205	4390	

塔机回转部分 Slewing		L(m)	l(m)	h(m)	Kg
变幅小车 Trolley		5.275	2.300	1.621	2452
吊钩滑轮组 Hook assembly		2.720	0.428	3.175	2682
十字梁 Cross-beam		5.47	4.97	2.47	18420
过渡节 Transition mast		6.04	3.35	3.35	7586
顶升装置 Telescoping equipment		L(m)	l(m)	h(m)	Kg
套架 Telescopic cage		13.55	7.210	6.745	32080
塔身部分 Mast		L(m)	l(m)	h(m)	Kg
加强节 Reinforcing mast		5.990	4.336	4.336	8500
标准节 Standard mast		5.990	4.336	4.336	7300
底部 Base		L(m)	l(m)	h(m)	Kg
固定支脚 Fixing angles		1.79	0.900	0.900	780
底梁 I Girder I		8.792	1.273	1.655	7144x2



底部 Base		L(m)	l(m)	h(m)	Kg
底梁 II Girder II		8.947	1.273	1.640	7515x2
拉杆 Tie rod		7.287	0.260	0.602	1418x4
斜撑杆 Obliguel legs		8.615	0.400	0.550	2614x4
底架塔节1 Chassis-mast 1		5.990	4.865	4.865	10315
底架塔节2 Chassis-mast 2		6.010	4.749	4.749	10051

机构特性 Mechanisms specification			U				U ₃				U ₃					Kw				
起升 Hoisting		160LVF	m/min	0-3.9	0-16	0-33	0-57	0-84	0-1.9	0-8	0-16	0-28	0-42	0-12	0-5.5	0-11	0-19	0-28	970	160
			t	21	21	21	10.5	5.25	4.2	4.2	4.2	21	10.5	64	64	64	32	16		
变幅 Trolleying		22TVF	m/min	0-34														22		
回转 Slewing		11SVF	r/min	0-0.6														11x4		
行走 Travelling		7.5TRVF	m/min	0-12														7.5x8		
 电源		Power Supply		380V 50Hz /440V 60Hz																
KVA 供电容量		Necessary Electric Power		400KVA																

平衡臂配重
Counter-jib ballast

		 (t)
80m	24m	87.45
70m	24m	73
60m	24m	63.4
50m	24m	51.2

可变换的其它安装方式
Mounting possibilities



 同我们协商
Consult us

F 反力
Reactions

- 工作状态 In service
- 非工作状态 Out of service

 自重
Self-load

不带载荷及配重，最大臂长及标准高度时的自重。
Without load and counter-weight with longest jib and standard height